

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

**10/031735**INTERNATIONAL APPLICATION NO.  
PCT/NL00/00520INTERNATIONAL FILING DATE  
21/07/2000PRIORITY DATE CLAIMED  
22/07/1999**TITLE OF INVENTION**

METHOD FOR MANUFACTURING A DOUBLE-WALLED HEAT EXCHANGING TUBE WITH LEAK DETECTION AND SUCH HEAT EXCHANGING TUBE

**APPLICANT(S) FOR DO/EO/US**

Roffelsen, Franciscus

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 11 to 20 below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
  - ☒ Express Mail Certificate EL841094962US
  - ☒ Check for \$1,020.00
  - ☒ PCT Preliminary Examination Report
  - ☒ Itemized Postcard;
  - ☒ PCT Publication

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

10/031735

21. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1040.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$890.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$740.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$710.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4).....\$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS PTO USE ONLY

\$ 890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	16 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x \$84.00

\$ 0.00

\$ 0.00

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

+ \$280.00

\$ 0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$ 1,020.00

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.

\$ 0.00

**SUBTOTAL =**

\$ 1,020.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

**TOTAL NATIONAL FEE =**

\$ 1,020.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 0.00

**TOTAL FEES ENCLOSED =**

\$ 1,020.00

Amount to be refunded:

\$

charged:

\$

- a. ☒ A check in the amount of \$ 1,020.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 22-0257. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

VARNUM, RIDDERING, SCHMIDT & HOWLETT LLP  
Bridgewater Place, P. O. Box 352  
Grand Rapids, MI 49501-0352  
(P) (616) 336-6000 (F) (616) 336-7000

SIGNATURE

Peter Visserman

NAME

25,185

REGISTRATION NUMBER

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant(s): Roffelsen, Franciscus

For: METHOD FOR MANUFACTURING A DOUBLE-WALLED HEAT EXCHANGING  
TUBE WITH LEAK DETECTION AND SUCH HEAT EXCHANGING TUBE

International Application No. PCT/NL00/00520

International Filing Date: 21/07/2000

Atty. Docket: Vereenigde P50US

Assistant Commissioner of Patents  
Washington, DC 20231

Sir:

**PRELIMINARY AMENDMENT**

Prior to the calculation of the filing fee, please amend the application as follows:

**In the Claims:**

Claim 3, line 1, please delete "or 2";

Claim 5, line 1, please delete "any one of the preceding claims" and substitute  
therefore --claim 1--;

Claim 6, line 1, please delete "any one of claims 1-5" and substitute therefore --  
claim1--;

Claim 7, line 1, please delete "any one of claims 1-5" and substitute therefore --  
claim 1--;

Claim 8, line 1, please delete "any one of the preceding claims" and substitute  
therefore --claim 1--;

Claim 9, please delete "any one of the preceding claims" and substitute therefore  
--claim 1--;

Claim 12, line 1, please delete "or 11";

Claim 13, line 1, please delete "any one of the claims 10-12" and substitute  
therefore --claim 10--;

200150 SECT001

**PATENT**

Claim 14, line 1, please delete "any one of the claims 10-12" and substitute therefore --claim 12--;

Claim 15, line 1, please delete "any one of the claims 10-12" and substitute therefore --claim 10--;

**REMARKS**


The amendment to the claims of the application are made in order to avoid surcharges for multiple dependent claims. It is respectfully requested that the amendments be entered prior to the calculation of the filing fee.

Respectfully submitted,

Date

1/21/02

By



Peter Visserman, Reg. No. 25,185

VARNUM, RIDDERING, SCHMIDT & HOWLETT

Bridgewater Place

Post Office Box 352

Grand Rapids, Michigan 49501-0352

(616) 336-6000

#658678

2007-01-21 11:00 AM

Title: Method for manufacturing a double-walled heat exchanging tube  
with leak detection and such heat exchanging tube.

This invention relates to a method for manufacturing a double-walled heat exchange tube with leak detection, wherein an inner tube is slipped into an outer tube, after a surface profiling has been provided on at least the outer surface of the inner tube or the inner surface of the outer tube, and after the inner and outer tubes have been slipped one into the other, the inner tube is expanded such that the outer surface of the inner tube is in intimate contact with the inner surface of the outer tube and the surface profiling forms at least one leak detection channel between the two tubes.

Such a method is known from DE-A-30 00 665. In that method, a surface profiling is provided on the outer surface of the inner tube in the form of a serration with a great multiplicity of pointed, pyramid-shaped or cone-shaped projections. To obtain a proper heat transfer, upon expansion of the inner tube slipped into the outer tube, the tips of the various projections are pressed into the inner wall of the outer tube. Although as a result of such impression the magnitude of the contact surface between inner and outer tube is in the order of an unworked contact surface, the resulting heat transfer, in comparison with a one-piece heat exchange tube without leak detection, can be qualified as disappointing, while that heat transfer moreover deteriorates according as the heat exchange tube is longer in use.

To obtain an improved heat transfer, it is therefore proposed in DE-C-3706408 to fill up the leak detection channel with a heat-transferring fluid. As appears from the test diagram, although the heat transfer is thereby improved, it still remains considerably below that of a one-piece heat exchange tube without leak detection. In addition, this known

composite heat exchange tube must meet particular conditions to maintain the leak detection function. The leak detection channel should be designed as a capillary gap and the heat-transferring fluid should have a boiling point above the maximum operating temperature of the heat exchange tube.

5 Only then, due to the capillary action, will the fluid normally not run from the leak detection channel, but be forced therefrom in the event of leakage and thus indicate the presence of a leak. Not only is this a complicated system imposing specific requirements, but, moreover, it remains to be seen whether expansion of the heat-transferring fluid, as it heats up during use  
10 of the heat exchange tube, is not confusing, i.e. readily leads to the incorrect assumption that leakage is involved because fluid (due to expansion) is forced from the capillary leak detection channel.

Further, GB-A-822.705 discloses a heat exchange tube composed of three parts, such as an outer tube, an inner tube and a helical strip  
15 provided between those tubes and soldered both to the inner tube and to the outer tube. This construction is formed by first slipping the three parts into one another, with a layer of solder provided between each two parts. Next, the inner tube is expanded, or the outer tube is compressed, to form a mechanical connection between the assembly of outer tube, helical strip and  
20 inner tube, which mechanical connection is supplemented with a soldered joint by subjecting the assembly, during or after the deforming operation, to a heat treatment. Over a non-soldered joint, this soldered joint has the advantage that at the transition between a tube and the strip, a better, i.e. more complete, joint can be realized. On the other hand, however, through  
25 the use of three parts, the construction is more complicated; the parts, when being slipped into each other, can be positioned relative to each other less accurately due to the presence of a helical and hence flexible strip, resulting in a leak detection channel having an irregular cross section along the length thereof; the deformation of one of the tubes is to be effected through  
30 the interposition of the helical, flexible, separate strip, resulting in a

1003735-051002

mechanical connection that can be less controlled and defined; and, last but not least, there are two transitional areas formed by solder, which adversely affects the heat transfer because solder, for instance tin, always has a lower coefficient of heat transfer than the materials, for instance copper, of the parts to be connected.

The object of the invention is to increase the heat transfer to a value equal or substantially equal to that of a one-piece heat exchange tube, while, moreover, the leak detection channel remains free of filling media and thus fulfills its function directly, accurately and reliably.

In accordance with the invention, this is achieved in a method described in the preamble, if

- prior to slipping the inner and outer tubes one into the other, at least the outer surface of the inner tube or the inner surface of the outer tube is provided with a layer of soldering material, such as tin;
- the expansion of the inner tube is effected such that the outer tube is expanded as well; and
- the layer of soldering material between inner and outer tube is caused to melt;

wherein the expansion of the outer tube is effected such that the molten solder layer is largely forced out between the inner tube and the outer tube into the at least one leak detection channel.

Through these features, an optimum contact between inner and outer tube is created and maintained during use of the heat exchange tube.

By expanding the outer tube by way of the inner tube, the effect achieved is that upon shrinkage of the inner tube due to a decrease in temperature of the heat exchange medium passed therethrough, the inner tube, by elastic rebound, always continues to follow the inner tube, so that the close contact between inner and outer tube is always maintained.

Accomplishing and maintaining that intimate contact is also effected and supported by soldering the inner tube and the outer tube

together. Protracted tests have shown that, for instance in the case of copper/copper contact without a connecting layer, the heat transfer is highly dependent on the nature of the adjoining copper surfaces, the degree of contact (air inclusion) and the pressure at the location of the abutment. The heat transfer may decrease considerably in the course of time. It is assumed that the reason for this is the oxidation of the adjoining surface layers, partly as a result of relative movements of the surfaces through temperature change during use of the heat exchange tube. By connecting the contacting surfaces with a layer of solder from, for instance, tin, the above effect reducing the heat transfer in the course of time has been found not to occur anymore.

Tin has a lower coefficient of heat transfer than copper. It would seem, therefore, that the provision of a layer of tin between two adjoining copper surfaces has an adverse effect on the heat transfer. When the method of the invention is used, however, a heat exchange tube is obtained having a heat transfer which hardly, if at all, differs measurably from that of a one-piece copper tube. This surprising effect seems to be the result of the pressure generated between the inner and outer tube by expanding the assembly of those tubes. This pressure is such that upon melting of the layer of tin, all excess tin is forced out into the leak detection channel, leaving only a very thin film of tin, which moreover is fused with the adjoining copper surfaces. In this manner, the copper/copper contact is optimally maintained, with the (connective and filling) tin providing that no mutual detachment through relative displacement and hence no oxidation can take place, with the result that the optimum heat transfer is maintained undiminished, also in the course of time during the use of the heat exchange tube.

This effect is partly the result of the use of only two tubes which are slipped one into the other and which are each alone relatively rigid. When, through expansion of the inner tube, the outer tube is expanded, so high a



surface pressure is generated on the contact area between those tubes, that during heating of the assembly, the layer of solder present between the outer tube and the inner tube is forced out practically completely, thereby yielding the copper-copper contact already mentioned. When the assembly consists of three or more parts, during the expansion of the first part, the surface pressure between the second and the third part will be less, due to the "loose" second part, because this part, certainly if in addition it is of helical design, can also deform in axial direction. Partly because the transition can be determined less accurately, as observed hereinabove, this may lead to the layer of solder being insufficiently forced out, if at all, and hence to a reduced heat transfer. Because the heat transfer depends on the weakest link in the chain, if the heat transfer between the second and the third part is less, the heat transfer of the entire construction is lower than the possible heat transfer between the first and the second part. Thus, for the present object, a two-piece construction has the critical advantages of an accurate reproducibility, an always optimal heat transfer, which, as stated above, does not measurably differ from that of a one-piece heat exchange tube, and a simple manufacture.

To enable the outer tube to optimally follow the inner tube as the latter becomes colder, it is preferred, according to a further embodiment of the invention, to manufacture the inner tube from a softer material than the outer tube. Through this feature, the elastic rebound force in the harder outer tube will be greater than in the softer inner tube, so that the outer tube will in each case be more inclined to rebound than the inner tube and the closely abutting contact between inner and outer tube is in each case optimally established and maintained and also the forcing out of the molten solder layer to the desired degree is always guaranteed still better.

The surface profiling for forming the leak detection channel can be performed in many ways. In accordance with a further embodiment of the invention, however, it is preferred that the surface profiling is performed

such that, measured on the respective surface of the respective tube, it occupies at most about 50% of that surface. Extensive test measurements have shown that a double-walled heat exchange tube can then be realized which has optimum leak detection properties and a heat transfer which

5 hardly, if at all, differs measurably from that of a one-piece tube.

In accordance with the extremely stringent government requirements applying in the Netherlands, the leak detection channel must be so arranged that when a through hole of a diameter of 2 mm is drilled in the heat exchange tube in a critical part thereof, and a water pressure of  
10 50 kPa is applied on both sides of the tube, leakage fluid flowing from the leak detection channel must be detected within 300 s. This requirement can be met with a heat exchange tube according to the invention, and this without loss of heat transfer compared with a one-piece heat exchange tube if, according to a further embodiment, the surface profiling is provided in  
15 the form of a helical groove of a width of about 2 mm and a pitch of about 4 mm.

Heating the assembly of outer tube and inner tube for melting the layer of solder can be advantageously effected by further heat treatments to be performed on the heat exchange tube, for instance during heating for  
20 soldering fin-shaped members to at least the outer surface of the outer tube or the inner surface of the inner tube, such as a wire spiral helically wound around the tube.

A layer of solder can be provided on the inner or the outer tube or on both, independently of the presence and the time of provision of a surface  
25 profiling for forming the leak detection channel. In accordance with the invention, however, it is preferred that when the outer surface of the inner tube is coated with a layer of soldering material, a surface profiling in the form of at least one helically extending groove is subsequently provided therein. If it is preferred to provide a surface profiling in the inner surface  
30 of the outer tube, for instance through extrusion, then preferably the outer

surface of the inner tube is provided with a layer of soldering material and the inner surface of the outer tube is provided with a surface profiling in the form of longitudinally extending grooves.

Depending on the application involved, it may be advantageous to pay particular attention to the ends of the heat exchange tube to prevent splitting of the two tubes, starting from an end. In that case, it is proposed that a silver weld be provided at each end of the assembly of inner and outer tube, at the seam between inner and outer tube.

Alternatively or supplemental thereto, it is further possible that at least one of the ends of the assembly of inner and outer tube, at least the inner surface of the inner tube or the outer surface of the outer tube is provided with an insulating coating of lacquer. In this manner, the end in question is shielded from unduly great heat shocks upon a sudden change in the temperature of the heat exchange medium being passed through, for instance as may occur in central heating installations.

The invention also relates to a heat exchange tube with leak detection comprising an assembly consisting of an outer tube and an inner tube in intimately abutting contact therewith, and at least one leak detection channel extending in and adjacent to the interface between inner and outer tube, as known, for instance, from DE-A-30 006 65. To realize an optimum heat transfer in such a heat exchange tube, and also to maintain this optimum heat transfer in the course of time during use, it is proposed, according to the invention, that at the location of the contact between inner and outer tube, a film-thin layer from soldering material, such as tin, is present, which is connected to both the inner tube and the outer tube by fusion, the inner tube and the outer tube abutting against each other under a bias, so that the film-thin layer can, as it were, be porous, i.e. locally interrupted.

To render the leak detection channel optimally accessible and operational without essentially influencing the ends of the heat exchange

tube, it is proposed, according to a further embodiment of the invention, that adjacent an end of the assembly of inner and outer tube, a through opening is provided in the outer tube, which through opening is in communication with the or each leak detection channel provided in the assembly.

Further protection of the ends against heat shocks is possible if at least one of the ends of the assembly of inner and outer tube, at least the inner surface of the inner tube or the outer surface of the outer tube is provided with an insulating coating of lacquer. If, for increasing the heat-transferring capacity, fin-shaped members, such as a wire spiral helically wound around the tube, are soldered to at least the outer surface of the outer tube or the inner surface of the inner tube, it may be preferred to omit those fin-shaped members along the length of the coating of lacquer.

With reference to exemplary embodiments represented in the drawing, the method, and heat exchange tube to be obtained thereby, according to the invention, will presently be further discussed, though by way of example only. In the drawing:

Fig. 1 shows in elevation a first assembly of an inner tube and an outer tube partly slipped into each other, with a part of the inner tube cut away;

Fig. 2 shows a cross section taken on the line II-II in Fig. 1;

Fig. 3 shows a cross section corresponding to Fig. 2 of a completed heat exchange tube;

Fig. 4 shows in elevation a second assembly of an inner tube and an outer tube, partly slipped into each other, with a part of the inner tube and of the outer tube cut away;

Fig. 5 shows half a cross section taken on the line V-V in Fig. 4; and

Fig. 6 shows a third variant of a heat exchange tube.

Fig. 1 shows an inner tube 1 partly slipped into an outer tube 2. The inner tube 1 is manufactured from a smooth copper tube whose outer

surface has first been provided with a thin layer of tin 3, whereafter four regularly spaced apart helically extending grooves 4 have been provided in the tin-plated surface. The outer tube 2 consists of a smooth copper tube having an inside diameter slightly greater than the outside diameter of the layer of tin on the inner tube 1.

After the inner tube 1 has been slid completely into the outer tube 2, the assembly thus obtained is subjected to a deforming operation, whereby the inner tube 1, if so desired in more than one step, using a drawing mandril, is expanded and plastically deformed such that the layer of tin proceeds to abut tightly against the inner surface of the outer tube. To maintain this abutment also upon shrinkage of the inner tube 1 due to a decrease in temperature, the expansion of the inner tube 1 is continued until the outer tube 2 is expanded as well, in such a manner that an elastic bias is generated in the outer tube 2, which provides that the outer tube 2 continues to follow the inner tube 1 upon shrinkage.

After this expanding operation, the assembly is heated to a temperature such that the layer of tin 3 starts to melt. Partly due to the elastic bias in the outer tube 2, the molten tin will start to flow and thereby, on the one hand, fuse with the copper of the two adjoining tube surfaces and, on the other, be pressed from between those two copper surfaces into the grooves 4. Thus, after the heat treatment, the two copper surfaces are soldered together in that the tin has filled and supplemented the two copper surfaces in such a manner that they actually merge without interruption. As a result, although the two copper surfaces are bonded together by the layer of tin, that layer of tin has at the same time been reduced, through the bias in the outer tube, to an extremely thin, as it were porous, film. This, in turn, has as a result that, despite the fact that tin has a lower coefficient of heat transfer than copper, the heat transfer by the assembly of tubes is hardly, if at all, measurably less than that of a comparable solid copper tube, even if the surface of the groove is as large as that of the residual rib.

Bonding the two surfaces together by means of the tin has as a consequence, inter alia, that during heat movements, shrinkage or expansion, no displacements between the two surfaces occur. This, and the fact that by filling up with tin any small irregularities between the two surfaces and forcing the excess tin into the grooves, any inclusions of air are removed, prevent oxide formation on the copper contact surfaces, and in particular slowly inwardly progressing oxidation of the copper surfaces at either of the ends (splitting through notch effect). Since oxide formation has a highly adverse effect on the heat transfer, what is thus accomplished as well is that the proper heat transfer of the composite heat exchange tube according to the invention, which, as stated, is comparable to that of a solid copper tube, is maintained also in the course of time during use.

Fig. 2 shows the assembly of inner tube 1 and outer tube 2 before the expanding operation; Fig. 3 shows this assembly after termination of the heat treatment, i.e. in the completed condition. This is expressed in Fig. 3 in that it no longer shows the layer of tin, reduced to an extremely thin, if not porous, film, but indicates the excess tin, forced into the grooves 4, as solidified drops 3'. In Fig. 3 it is further indicated that the tubes have been expanded with respect to the situation in Fig. 2, i.e., all diameters of the tubes have increased, while further the outside diameter of the inner tube 1 has become equal to the inside diameter of the outer tube 2.

It is noted that the various dimensions are not shown to scale, which is true in particular of the layer of tin 3. Hereinbelow, it is indicated, exclusively by way of example, how a composite heat exchange tube having an outside diameter of 28.3 mm and an inside diameter of 23 mm can be obtained.

The starting point is an inner tube of half-hard copper having an outside diameter of 25 mm and an inside diameter of 22 mm and an outer tube of hard copper having an outside diameter of 28 mm and an inside diameter of 25.6 mm. After the tubes have been inserted one into the other

and expanded in two steps, a composite heat exchange tube functioning as a one-piece heat exchange tube is obtained, having an outside diameter of 28.3 mm and an inside diameter of 23 mm, the transition (tin film) between the inner and outer tubes being located at a diameter of 26 mm. The total wall thickness involved has decreased from 2.7 mm to 2.65 mm. This is a result of the cold deformation (expansion) whereby the composite tube becomes slightly longer. The measurements mentioned have been selected after it had been established, through tests, that at such a degree of expansion, the elastic rebound of the outer tube is sufficient for the outer tube to follow a sudden shrinkage of the inner tube due to a temperature shock of 100° C to 10° C without itself needing to decrease in temperature. The choice of material (half-hard copper for the inner tube and hard copper for the outer tube) promotes the desired elastic rebound effect, because softer material rebounds less than harder material.

In the exemplary embodiment according to Figs. 4 and 5, a copper inner tube 11, provided with a layer of tin 13, has been inserted into an outer tube 12 whose inner surface comprises fifteen grooves 14, for instance obtained by extrusion, extending in longitudinal direction of the tube. The situation in which the two tubes are shown is identical to that of Fig. 1, i.e., after the tubes have been completely slipped one into the other, expansion will take place to the degree described in the foregoing, after which, through a heat treatment, the layer of tin 13 is caused to melt, whereby the excess tin at the location of the longitudinal ridges on the outer surface of the inner tube 11, as described hereinabove, is forced out, to form a residual, filling and connective film of tin, into the longitudinal grooves 14 forming a leak detection channel, thus yielding a composite heat exchange tube with heat detection functioning as a one-piece heat exchange tube and having a configuration comparable to that according to Fig. 3.

Fig. 6 shows a heat exchange tube comprising an inner tube 21 and an outer tube 22, tightly abutting against each other and connected through

20075052007  
a film of tin, all in a manner as discussed hereinabove. At the transition between the two tubes 21, 22, a single helical groove 24 has been provided in the outer surface of the inner tube 21, which groove forms a leak detection channel. Such a leak detection channel is prescribed in situations where the heat-releasing medium must never come into contact with the heat-absorbing medium. If a crack is formed in the inner or the outer tube, medium leaking therethrough will end up in the leak detection channel. To be able to establish the presence of fluid in the leak detection channel, this should be perceptible. For this reason, an opening 25 has been provided in the outer tube 22, which opening is in open contact with the leak detection channel. The opening 25 may be in communication with a leak detection means detecting the medium which has leaked or a change in pressure.

It has already been mentioned that the splitting of the composite heat exchange tube is extremely disadvantageous to the heat transfer, and how such splitting is prevented in the present heat exchange tubes. A further safeguard in this regard can be provided through the provision of a silver weld 26 (see Fig. 6) at the transition between the inner tube 21 and the outer tube 22, at at least one of the ends of the composite heat exchange tube. In addition to or instead of this reinforcement, it may also be provided that the end in question is less exposed to heat shocks through the provision of an insulating coating of lacquer 27 (see Fig. 6).

To increase the heat transfer, fins or ribs may be provided on the outer surface of the outer tube 22 or the inner surface of the inner tube 21. Such fins or ribs can be formed through extrusion. Another possibility is the provision of a helically wound wire 28 (for instance having a trapezoidal winding profile; see Fig. 6) which is subsequently wound helically around the outer tube 22. Connecting such wire to a tube is effected by soldering. This heat treatment may simultaneously serve to melt the layer of tin between the inner tube and outer tube to obtain a composite heat exchange tube functioning as in one piece, as described in the foregoing.



In the embodiment according to Fig. 6, the inner tube is likewise provided with fin-shaped members, again in the form of a helically wound wire 29 helically wound around and fixed on a support tube 30 concentrically inserted into the inner tube 21. If desired, the inner surface of the inner tube 21 may be tin-plated, so that during the heat treatment referred to above, the ends of the wound wire 29 remote from the support tube 30 are secured to the inner surface of the inner tube 21.

It is readily understood that within the framework of the invention as laid down in the appended claims, many more modifications and variants are possible. Thus, for forming a leak detection channel in the above-discussed exemplary embodiments, grooves are provided in the inner surface of the outer tube or the outer surface of the inner tube. Of course, grooves may also be provided in both surfaces, or the various grooves may be interconnected by further grooves, yielding a more or less knurled surface. Further, copper and tin are mentioned as applicable materials; however, this does not exclude the use of other materials. Further, under certain circumstances, it is possible to omit the heat treatment for melting and partly forcing out the layer of tin, for instance when the expansion is accompanied by a heat development such that the soldering material already melts during expansion.

## CLAIMS

1. A method for manufacturing a double-walled heat exchange tube with leak detection, wherein an inner tube is slipped into an outer tube, after a surface profiling has been provided on at least the outer surface of the inner tube or the inner surface of the outer tube, and, after the inner and outer tubes have been slipped one into the other, the inner tube is expanded such that the outer surface of the inner tube is in intimate contact with the inner surface of the outer tube and the surface profiling forms at least one leak detection channel between the two tubes, characterized in that
- prior to slipping the inner and outer tubes one into the other, at least the outer surface of the inner tube or the inner surface of the outer tube is provided with a layer of soldering material, such as tin;
  - the expansion of the inner tube is effected such that the outer tube is expanded as well; and
  - the layer of soldering material between inner and outer tube is caused to melt;
- wherein the expansion of the outer tube is effected such that the molten layer of solder is largely forced out between the inner tube and the outer tube into the at least one leak detection channel.
2. A method according to claim 1, characterized in that the inner tube is manufactured from a softer material than the outer tube.
3. A method according to claim 1 or 2, characterized in that the surface profiling is carried out such that, measured on the respective surface of the respective tube, it occupies at most about 50% of that surface.
4. A method according to claim 3, characterized in that the surface profiling is provided in the form of a helical groove having a width of about 2 mm and a pitch of about 4 mm.

5. A method according to any one of the preceding claims, characterized in that the heating takes place by soldering on at least the outer surface of the outer tube or the inner surface of the inner tube, fin-shaped members such as a wire spiral wound helically around the tube.
- 5 6. A method according to any one of claims 1-5, characterized in that the outer surface of the inner tube is coated with a layer of soldering material and subsequently a surface profiling in the form of at least one helically extending groove is provided therein.
7. A method according to any one of claims 1-5, characterized in that the  
10 outer surface of the inner tube is provided with a layer of soldering material, and the inner surface of the outer tube is provided with a surface profiling in the form of longitudinally extending grooves.
8. A method according to any one of the preceding claims, characterized in that at each end of the assembly of inner and outer tube, a silver weld is  
15 provided at the seam between inner and outer tube.
9. A method according to any one of the preceding claims, characterized in that at at least one of the ends of the assembly of inner and outer tube, at least the inner surface of the inner tube or the outer surface of the outer tube is provided with an insulating coating of lacquer.
- 20 10. A heat exchange tube with leak detection comprising an assembly consisting of an outer tube and an inner tube in intimately abutting contact therewith, and at least one leak detection channel extending in and adjacent to the interface between inner and outer tube, characterized in that at the location of the contact between inner and outer tube, a film-thin layer from  
25 soldering material, such as tin, is present, which, through melting, is connected to both the inner tube and the outer tube, with the inner tube and the outer tube abutting against each other under a bias.
11. A heat exchange tube according to claim 10, characterized in that adjacent an end of the assembly of inner and outer tube, a through opening

is provided in the outer tube, which is in communication with the or each leak detection channel provided in the assembly.

12. A heat exchange tube according to claim 10 or 11, characterized in that at at least one of the ends of the assembly of inner and outer tube, at  
5 least the inner surface of the inner tube or the outer surface of the outer tube is provided with an insulating coating of lacquer.

13. A heat exchange tube according to any one of claims 10-12, characterized in that onto at least the outer surface of the outer tube or the inner surface of the inner tube, fin-shaped members, such as a wire spiral  
10 wound helically around the tube, are soldered.

14. A heat exchange tube according to any one of claims 10-12, characterized in that on at least the outer surface of the outer tube or the inner surface of the inner tube, fin-shaped members, such as a wire spiral wound helically around the tube, are soldered, with those fin-shaped  
15 members being omitted along the length of the coating of lacquer.

15. A heat exchange tube according to any one of claims 10-12, characterized in that the surface profiling, measured on the respective surface of the respective tube, occupies at most about 50% of that surface.

16. A method according to claim 3, characterized in that the surface  
20 profiling is a helical groove having a width of about 2 mm and a pitch of about 4 mm.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number  
**WO 01/07856 A3**

(51) International Patent Classification<sup>7</sup>: F28F 1/00

(21) International Application Number: PCT/NL00/00520

(22) International Filing Date: 21 July 2000 (21.07.2000)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1012676 22 July 1999 (22.07.1999) NL

(71) Applicant (for all designated States except US): SPIRO  
RESEARCH B.V. [NL/NL]; Churchilllaan 52, NL-5705  
BK Helmond (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ROFFELSEN, Fran-  
ciscus [NL/NL]; Mauritslaan 7, NL-5707 CM Helmond  
(NL).

(74) Agent: PRINS, A., W.; Vereenigde, Nieuwe Parklaan 97,  
NL-2587 BN The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— With international search report.

(88) Date of publication of the international search report:  
17 May 2001

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.







(54) Title: METHOD FOR MANUFACTURING A DOUBLE-WALLED HEAT EXCHANGING TUBE WITH LEAK DETEC-  
TION

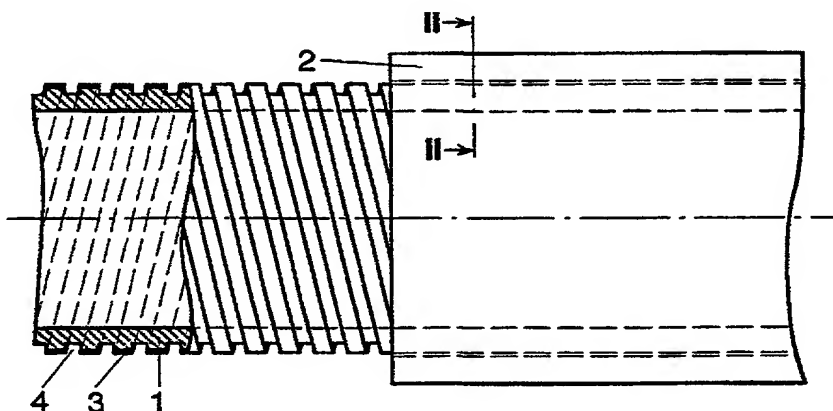

(57) Abstract: Method for manufacturing a double-walled heat exchange tube with leak detection, wherein an inner tube is slipped into an outer tube, after a surface profiling has been provided on at least the outer surface of the inner tube or the inner surface of the outer tube, and at least the outer surface of the inner tube or the inner surface of the outer tube has been provided with a layer of soldering material. After the tubes have been slipped into one another, the inner tube is expanded such that the outer tube is expanded as well and the surface profiling forms a leak detection channel between the two tubes, and the soldering material between inner and outer tube is caused to melt. In a heat exchange tube thus obtained, at the location of the contact between the inner and outer tube, a film-thin, optionally porous layer from soldering material is present, which layer is bonded, through melting, to both the inner tube and the outer tube.

WO 01/07856 A3

200150 SEEF001

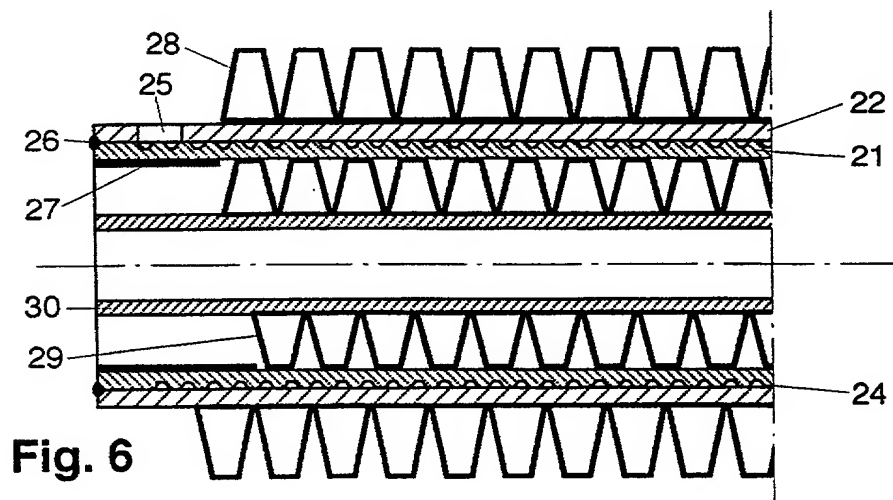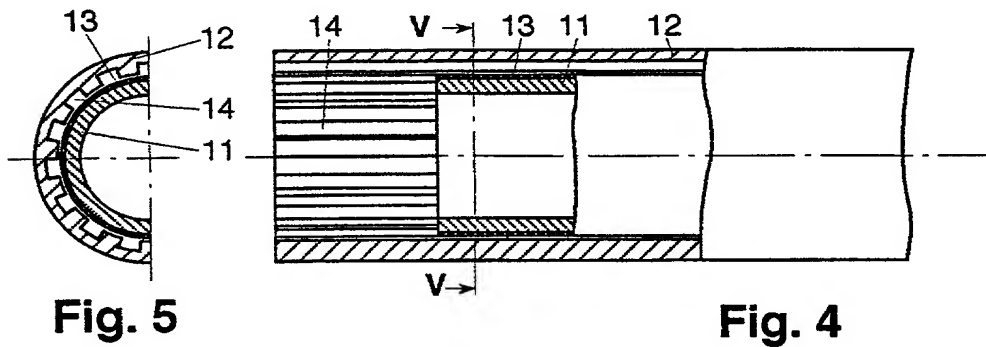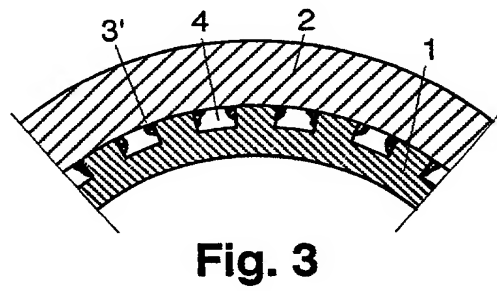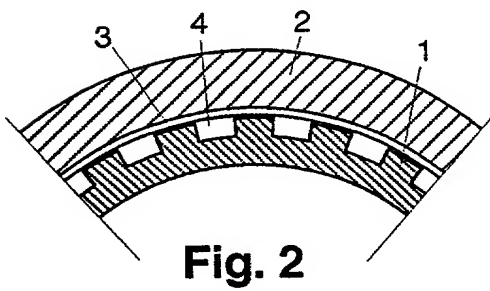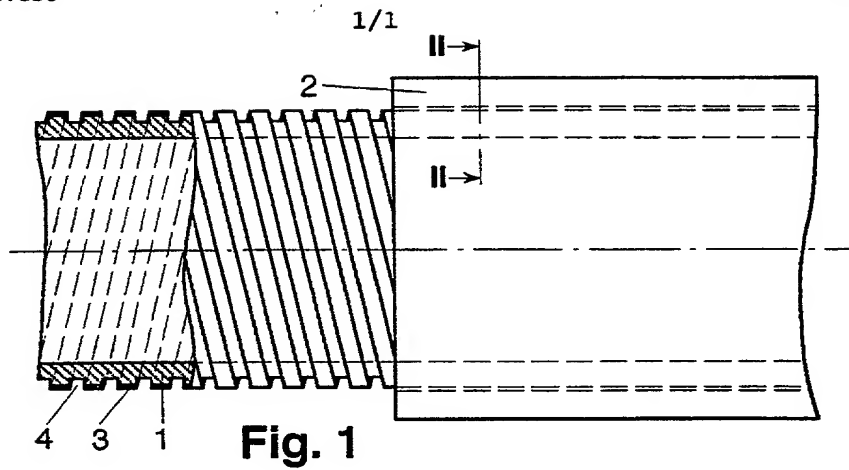

**Declaration and Power of Attorney Patent Application  
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: "Method for manufacturing a double-walled heat exchanging tube with leak detection and such heat exchanging tube."

the specification of which

- ☐ is attached hereto  
☒ was filed on January 21, 2002 as application serial no. 10/031,735  
and or PCT International Application number PCT/NL00/00520 and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 1012676	Country NL	Day/Month/Year Filed 22 July 1999
Number	Country	Day/Month/Year Filed
Number	Country	Day/Month/Year Filed

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. or International Application(s)		
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

200750 SEZTE001



## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Attorney

Registration Number

Peter Visserman  
Thomas L. Lockhart  
Timothy E. Eagle


~~25,185~~  
~~29,324~~  
31,755

(3)

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instructed otherwise.

Please direct all correspondence in this case to at the address indicated below:

~~VARNUM, RIDDERING, SCHMIDT, & HOWLETT~~  
~~Bridgewater Place~~  
~~P.O. Box 352~~  
~~Grand Rapids, Michigan 49501-0352~~  
~~United States of America~~

Full Name of Sole or First Inventor		
Family Name Roffelsen	First Given Name Franciscus	Second Given Name
Residence and Citizenship		
City of Residence Helmond	State or Country of Residence the Netherlands	Country of Citizenship the Netherlands
Post Office Address		
Street Address Mauritslaan 7	City Helmond	State & Zip Code or Country 5707 CM
Signature of Inventor 		Date 21-01-02

200750 SECT001